

www.GESecurity.com

MVC-21S

Color Monitor with Audio

Overview

GE Security's MVC-21S offers 500 TV lines of resolution and a 21-inch actual viewing area. When viewing images from 16 cameras at one time, each view appears in an area that is 5.25 inches from corner to corner.

The MVC-21S is housed in a durable metal cabinet and includes a built-in speaker. Front panel controls and an onscreen display make the MVC-21S easy to operate. It has two BNC video inputs and one Y/C video input.

The MVC-21S's looping video inputs are self-terminating. This enables you to use the MVC-21S by itself or daisy chain it with additional monitors or other CCTV equipment. The MVC-21S also includes auto video-loss detect and auto no-signal detect functions. Should the video signal to the monitor be cut off or fall below a preset threshold, the MVC-21S will sound an audible alarm.

Outstanding Features

The MVC-21S also includes a built-in three-channel switcher. The monitor sequences through all connected cameras automatically. You can also call up cameras manually using the front panel controls.

The MVC-21S's universal 100 to 240 VAC power input draws 80 W of power. Its NTSC and PAL compatible scanning system automatically detects camera video format. The monitor operates effectively in temperatures ranging from 14° to 194° F (-10° to 50° C).



Standard Features

- **21-inch viewing area**
- **Resolution: 500 TV lines**
- **Durable metal cabinet**
- **Front panel controls and onscreen display**
- **Built-in three-channel auto or manual switcher**
- **Built-in microprocessor digital control**
- **Self-terminating, looping video inputs**
- **Auto video-loss detect**
- **Auto no-signal detect**
- **Dwell time control**
- **Built-in speaker**
- **Universal power supply: 100 to 240 VAC**
- **NTSC/PAL compatible with auto detect function**

MVC-21S


Color Monitor with Audio

Specifications

MVC-21S 21-inch Color Monitor

- CRT: 21 in diagonal, flat screen (FST) color monitor
- Input power: 100 to 200 VAC, 50/60 Hz
- Power consumption: 80 W (max)
- Video input composite: 1.0 V pk-pk at 75 ohm load
- Scanning frequency: 15.734 KHz / 60 Hz (NTSC), 16.625 KHz / 50 Hz (PAL)
- Resolution: > 500 TVL (center)
- Video connectors: Video BNC in x 2, Y/C in x 1, Video BNC out x 2, Y/C out x 2
- Weight: 59.52 lb (27 kg)
- Operating temperature: 14° to 194° F (-10° to 50° C)
- Humidity: 10 to 90 percent

Related Diagram

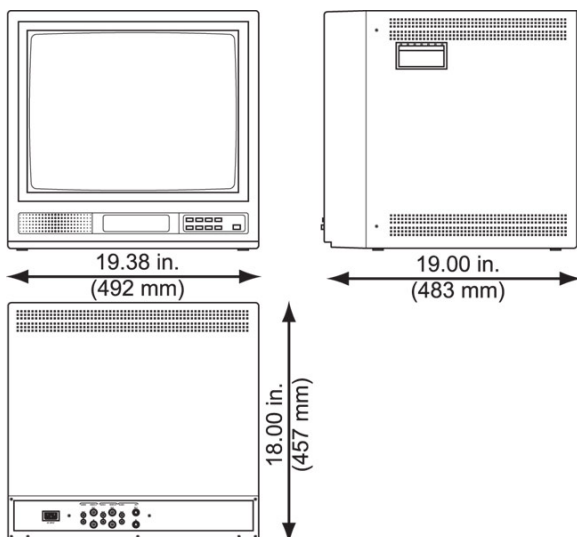

Ordering Information

MVC-21S



GE Security

Mailing Address
4575 Research Way, STE 250
Corvallis, OR 97333 USA
www.GESecurity.com

Americas
800-469-1676 (US only)
tel 541-754-9133
fax 541-754-7162

Asia
tel 852-2907-8108
fax 852-2142-5063
Australia
tel 61-3-9259-4700
fax 61-3-9259-4799

Europe
tel 32-2-725-11-20
fax 32-2-721-86-13
Latin America
tel 305-267-4301
fax 305-267-4300

www.GESecurity.com